
SUPER SERIES

Model 120-RC-60

Specifications

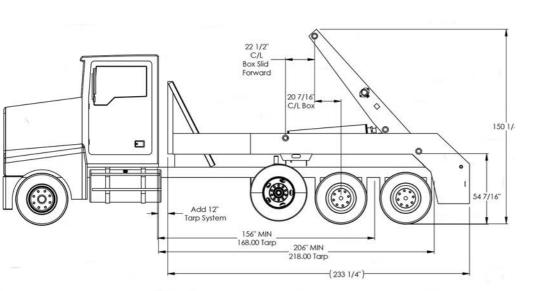

| Gross Lifting Capacity | 60,000 |
|------------------------|------------------------|
| Container Capacity | 6-30 cu. yds. |
| Arm Length | |
| | 10,200 lbs. |
| Hydraulic Capacity | 35 GPM |
| Operating Pressure | |
| Cylinder Size | 9 1/2" ID 3 1/2" Shaft |
| Rear Stabilizers | Hydraulic vertical |
| Dumping Operation | Hydraulic arm |
| | contact cyls |
| Cycle Time | |
| Down Position | |

| Down Position | |
|----------------|----------------|
| Up Position | 48 seconds |
| Subframe | 10" structural |
| Side Box | 1/2" plate |
| Floor Plate | 5/16" plate |
| Lifting Chains | 5/8" alloy |
| Controls | Cables |

Truck Requirements

| Tandem Axle | 50,000 lbs. |
|------------------------------|-------------|
| Front Axle | 20,000 lbs. |
| Back of cab to c/l of tandem | |
| Center of gravity | |
| Back of cab to end of frame | |

G.V.W. SUBJECT TO INDIVIDUAL STATE LAW