


# HIGH TONNAGE SERIES

## MODEL 96-RC-30

comparable to LL30A2

| Specifications               |                     |
|------------------------------|---------------------|
| Gross Lifting Capacity ..... | 30,000              |
| Container Capacity .....     | 6-12 cu. yds.       |
| Arm Length .....             | 96"                 |
| Weight .....                 | 5,900 lbs.          |
| Hydraulic Capacity .....     | 22 GPM              |
| Operating Pressure .....     | 2500 PSI            |
| Cylinder Size .....          | 7" ID 42 1/2" st    |
| Rear Stabilizers .....       | Hydraulic vertical  |
| Dumping Operation .....      | Hydraulic Trip hook |
| Cycle Time                   |                     |
| Down Position .....          | 41 seconds          |
| Up Position .....            | 36 seconds          |
| Subframe .....               | 10 in. structural   |
| Side Box .....               | 1/4" plate          |
| Floor Plate .....            | 1/4" plate          |
| Lifting Chains .....         | 1/2" alloy          |
| Controls .....               | Cables              |

| Truck Requirements                |             |
|-----------------------------------|-------------|
| Rear Axle .....                   | 34,000 lbs. |
| Front Axle .....                  | 16,000 lbs. |
| Back of cab to c/l of rear .....  | 84"         |
| Center of gravity .....           | 7"          |
| Back of cab to end of frame ..... | 135"        |

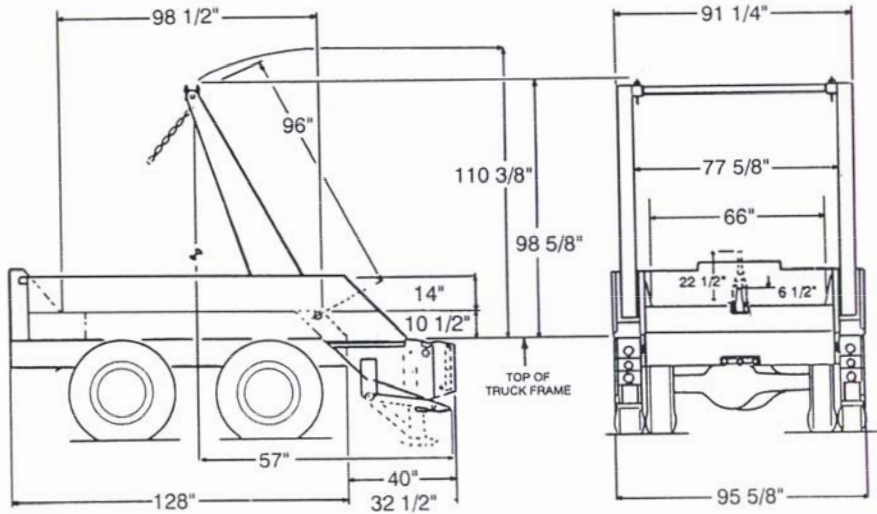


## MODEL 120-RC-30

comparable to LL30M2

| Specifications               |                      |
|------------------------------|----------------------|
| Gross Lifting Capacity ..... | 30,000               |
| Container Capacity .....     | 10-20 cu. yds.       |
| Arm Length .....             | 120"                 |
| Weight .....                 | 7,400 lbs.           |
| Hydraulic Capacity .....     | 22 GPM               |
| Operating Pressure .....     | 2500 PSI             |
| Cylinder Size .....          | 7 1/2" ID 47 1/2" st |
| Rear Stabilizers .....       | Hydraulic vertical   |
| Dumping Operation .....      | Hydraulic Trip hook  |
| Cycle Time                   |                      |
| Down Position .....          | 51 seconds           |
| Up Position .....            | 46 seconds           |
| Subframe .....               | 10 in. structural    |
| Side Box .....               | 1/4" plate           |
| Floor Plate .....            | 1/4" plate           |
| Lifting Chains .....         | 1/2" alloy           |
| Controls .....               | Cables               |

| Truck Requirements                |             |
|-----------------------------------|-------------|
| Rear Axle .....                   | 34,000 lbs. |
| Front Axle .....                  | 16,000 lbs. |
| Back of cab to c/l of rear .....  | 132"        |
| Center of gravity .....           | 35"         |
| Back of cab to end of frame ..... | 187"        |

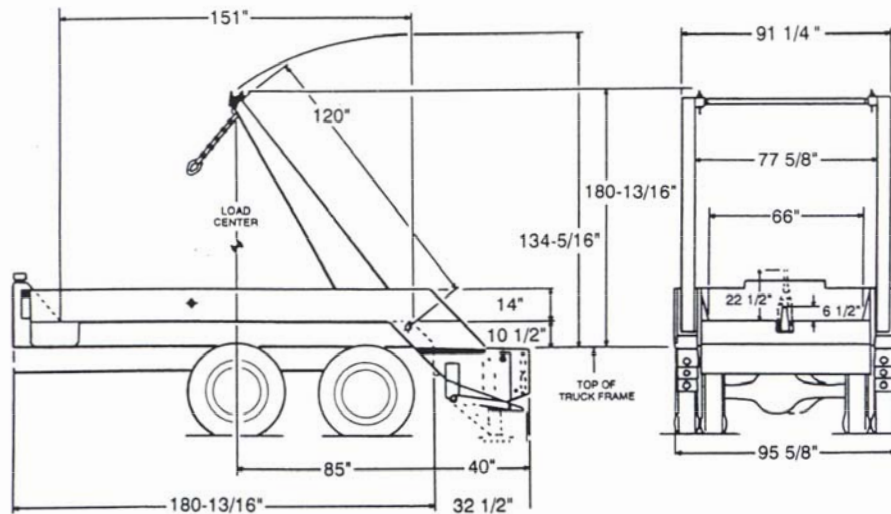

G.V.W. SUBJECT TO INDIVIDUAL STATE LAW