


ART-60-36 Tri-Axle Lift

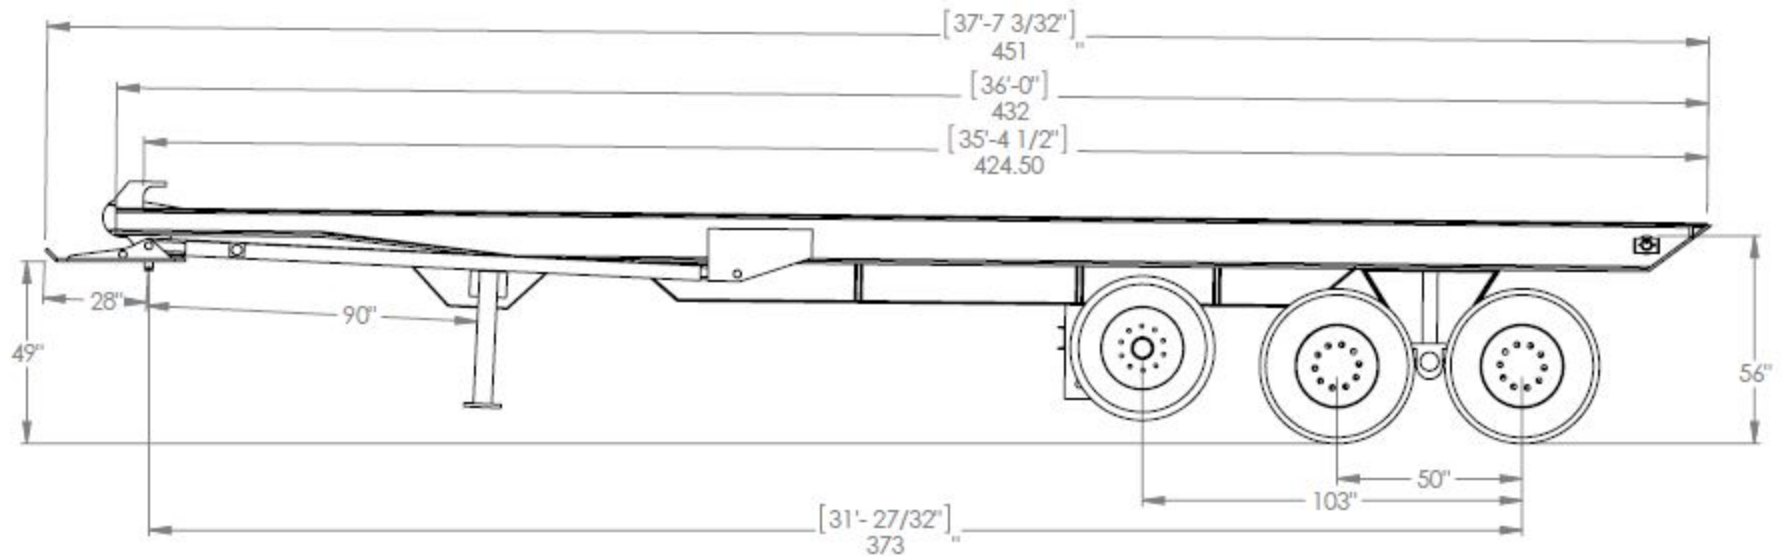

Specification:

60,000# Capacity, Designed to Haul up to 36' Outside Rail Containers
 12"x4"x3/8" Grade A Cross Members, 4"x4"x1/4" Stabilizer Frame
 3/4" King Pin Plate, 3/8"x4" Flat Bar Wear Pad,
 3" Shaft 7" Bore Reeve Cylinder (Duals)
 8"- 4 Stage Telescopic Main Lift Cylinders (Duals)
 7/8" IWRC Cable with 1" Ring
 10" Main Pulley with Bronze Bushing

50,000 # Tandem Single Point Rear Suspension, 25,000#
 Axles
 ABS Brakes, D.O.T Lights #108, fixed front stops
 Rear Fenders Rubber on Tandem
 ICC Regulated Bumper- Air Accuated
 Manual outside controls with Air Control Brake
 Color Industrial Enamel with Hardener (Black)

Options:

Air Lift Fourth Axle
 Aluminum Rims
 Auto Grease System
 Removable Stops

Hydraulic Tarp System
 In Cab Controls
 Auto Tire Inflate System

The information contained in this drawing is for illustrated purpose only, Brothers Equipment reserves the right to make changes at any time without notice.



Brothers Equipment Inc.

1335 East 171st Street, Cleveland, Oh. 44110
 800-578-8471 www.brosequip.com





