
ART-60-40-18-A3

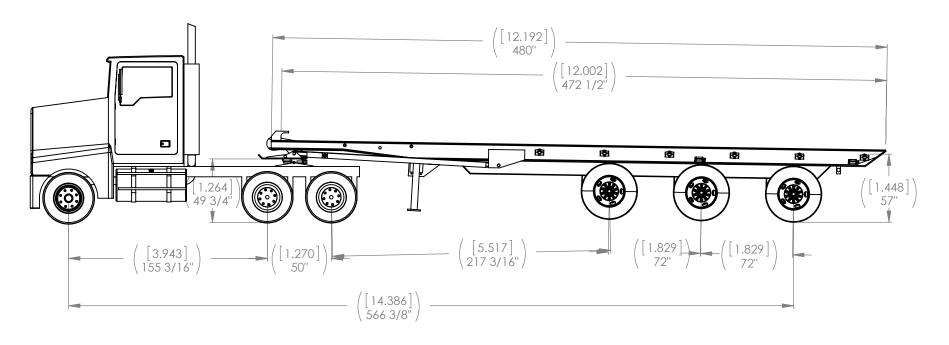

Specification:

60,000# Capacity, Designed to Haul up to 40' Outside Rail Containers 12"x4"x3/8" Grade A Cross Members, 4"x4"x1/4" Stabilizer Frame ³/₄" King Pin Plate, 3/8"x4" Flat Bar Wear Pad, 3-1/2" Shaft 7" Bore Reeve Cylinder (Duals) 8"- 4 Stage Telescopic Main Lift Cylinders (Duals) 7/8" IWRC Cable with 1" Ring 10" Main Pulley with Bronze Bushing

Tridem 30,000# Air Ride Suspension 72" axle spacing first axle lift rear axle dump, 25,000# Axles
ABS Brakes, D.O.T Lights #108, fixed front stops
Rear Fenders Rubber on Tandem
ICC Regulated Bumper- Air Accuated
Manual outside controls with Air Control Brake
Color Industrial Enamel with Hardener (Black)

Options:

Air Lift Fourth Axle
Aluminum Rims
Auto Grease System
Removable Stops

Hydraulic Tarp System
In Cab Controls
Auto Tire Inflate System
Disc Brakes

The information contained in this drawing is for illustrated purpose only, Brothers Equipment reserves the right to make changes at any time without notice.



Brothers Equipment Inc.

1335 East 171st Street, Cleveland, Oh. 44110 800-578-8471 www.brosequip.com



